SAFE-T-PUNCH ™

PRODUCT DATA SHEET

STP30N

August 2023 Rev 1






Small 30mm Diameter Single Glazing Device for 3 mm to 12 mm Toughened Glass

Components: -

Body: -	Black anodised aluminium
Plunger: -	Red anodised aluminium
Safety tag: -	Breakaway plastic
Impact tip: -	Carbide hard material
Adhesive: -	3M 4936 VHB Tape
Device Weight: -	33 g
Instructions Sticker Weight: -	7 g
Operating Instructions: -	Grade C Photo luminescent

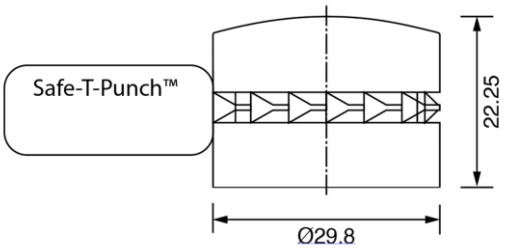

Performance data:-

Operating means: -	By Hand.
Operating force required: -	3 Joules.

Critical requirements: -

Installation: -	Install Safe-T-Punch™ on clearly marked readily breakable toughened safety glass only.
Suitability: -	NOT suitable for use on laminate glass (Front windscreen of vehicle).
Installation method: -	Clean, Peel and Stick.

Compliances: -

Conforming to regulations: -	UN ECE R107 Emergency Windows technical requirements. FMVSS 217 Window retention and release. International Maritime Organisation Regulation 13.

Quality: -

Safe-T-Punch™ is proudly produced in South Africa under TUV Certified ISO9001:2015 DAkkS Accredited quality management system.

Globally distributed by PLR Distribution (Pty) Ltd
www.Safe-T-Punch.co.za
Enquiries@Safe-T-Punch.co.za